

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
6 November 2003 (06.11.2003)

PCT

(10) International Publication Number  
WO 03/091581 A1

- (51) International Patent Classification: F16B 19/10, B21K 1/60
- (21) International Application Number: PCT/EP03/03651
- (22) International Filing Date: 9 April 2003 (09.04.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0209143.7 23 April 2002 (23.04.2002) GB
- (71) Applicant (for all designated States except US): NEWFREY LLC [US/US]; Drummond Plaza Office Park, 1423 Kirkwood Highway, Newark, DE 19711 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): JONES, Steven, Victor [GB/GB]; 34 Shenstone Road, Great Barr, Birmingham B43 5LN (GB).
- (74) Agent: HAAR, Lucas, H.; Haar & Schwarz-Haar, Lessingstrasse 3, 61231 Bad Nauheim (DE).
- (81) Designated States (national): JP, US.
- (84) Designated States (regional): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).
- Declaration under Rule 4.17:**  
— as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designations JP, European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR)
- Published:**  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: BLIND RIVET AND METHOD TO MAKE SAME

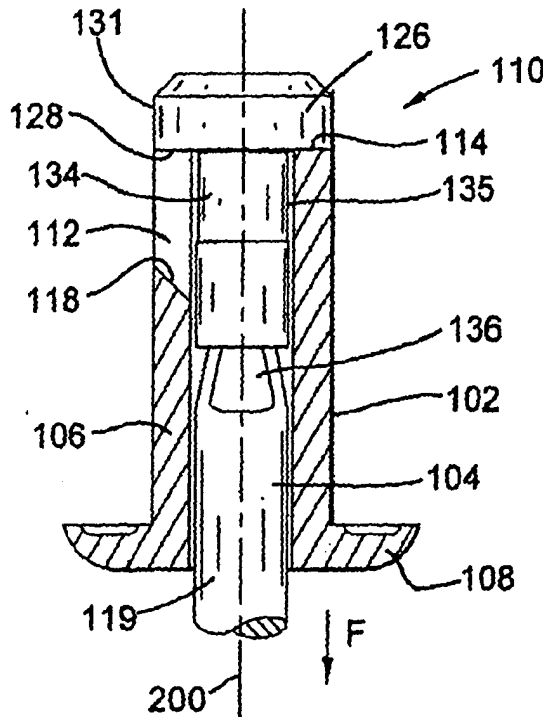

(57) Abstract: The invention is directed to a peel-type blind rivet assembly (110) for setting in relatively soft material and comprising an elongate tubular body (102) having a shank (106) with an enlarged head (108). A free end (114) of the shank, remote from the head (108), has an expandable portion formed by a plurality of slots (112) extending partway along the shank from this remote end (114). A mandrel (104) has a stem, and a mandrel head (126) with a maximum external diameter greater than the internal diameter of the body (102), wherein at least one of the plurality of slots (112) increases in width as it extends from an outer surface of the shank towards an inner surface of the shank. There is also provided a punch (280) for forming the tapered slots (112) in the rivet body, comprising an elongate solid body having a polygonal cross section wherein at least one convergence zone formed on an end face of the punch by the tapering convergence of two adjacent side walls forms a slot cutting element (285).

WO 03/091581 A1

## BLIND RIVET AND METHOD TO MAKE SAME

The present invention relates to an improved blind rivet, more particularly to a peel-type blind rivet which is particularly suitable for anchoring in relatively soft materials such as wood or plastics.

Conventional blind riveting techniques which are normally used to secure together two or more workpieces, utilise a blind rivet having a tubular shank with an enlarged head at the operative end thereof such that the shank can pass through a preformed hole in extending between two workpieces, whereby a mandrel disposed within the tubular rivet body having an enlarged head is then used to compress the rivet body on the blind side (ie. behind the workpieces to be set) to create a bulge which will compress the workpieces against the enlarged head.

15

However, where the blind side workpiece material is both of substantial thickness and is relatively soft, modified peel-type blind rivets have been employed which operate in a significantly different manner whereby the end of the rivet body, remote from the head (the blind side), is caused to split and form into a series of radially extending legs which compress and engage with the soft material into which the peel-type blind rivet has been displaced, whereby these legs are restrained remote from the head-end of the rivet, once set by providing appropriate means to arrest continued splitting or deformation of such legs. Existing peel-type blind rivets are divided into two distinct groups, the first of which has its body provided with a weakened region which will either be cut to form the required legs by cutting edges formed on the mandrel head or have preformed, weakened regions (such as channels) within the rivet body along which the body will rupture when the mandrel head is drawn into the rivet body. These type of rivets normally employ a dual thickness rivet body whereby the weakened regions are of a reduced thickness as compared to the main rivet

20  
25  
30

body such that continued splitting of the rivet is arrested when the mandrel head engages with the thickened portion of the rivet body. Blind rivets of this type are discussed in EP344,005 and EP328,314.

5       An alternative, preferred, form of peel-type blind rivet employs the use of preformed slots formed in the free end of the rivet body, which slots define the legs to be displaced during the setting operation. One example of a peel-type blind rivet of this type is disclosed in the applicants earlier British Patent No. GB 2332722.

10

          However, one of the disadvantages of peel-type blind rivets employing preformed slots is the complex manufacturing process required to form the slots in the shank of the rivet body requiring a specialised punch, usually comprising a cylindrical main body for receipt within the hollow rivet body and having four  
15       cutting arms extending radially outwards of this main body portion for cutting through the rivet shank to form the slots having substantially parallel sides. Since the width of the slots is relatively narrow, the corresponding cutting blades from the punch must also be relatively narrow and thus are subject to rapid wear due to the high forces exerted on these cutting blades. As such, conventional rivets  
20       having preformed slots are relatively expensive due to the associated costs of both manufacturing the complex punches and their high wear and failure rate.

          Therefore an object of the present invention is to alleviate the aforementioned problems and to provide an improved peel-type blind rivet, and  
25       a punch for forming slots in such rivets.

          According to the present invention there is provided a peel-type blind rivet assembly for setting in relatively soft material, this rivet assembly comprising:

an elongate tubular body having a shank disposed about a shank axis and a preformed head at a first end thereof and an expandable portion at the opposed end of the shank which is remote from the head, and which expandable portion is formed by a plurality of slots, which slots terminate remote from this  
5 first end;

the rivet assembly further comprising a mandrel having a stem extending through and co-axial with the tubular body, this mandrel further having a head having a maximum external diameter greater than the internal diameter of the body;  
10 wherein, at least one of said plurality of slots increases in width as it extends from an outer surface to an inner surface of the shank. In this manner, the slot itself is seen to taper as it increases in radius.

Preferably, the side walls of the at least one slot will be linear or alternatively  
15 they could be slightly curved, usually so as to be convex.

Usually, each of the plurality of slots will be equally spaced about the circumference of the tubular body so that the angular displacement between adjacent slots about the shank axis is constant.  
20

In a preferred embodiment, the plurality of slots will comprise three slots disposed at substantially 120° about the shank axis.

Usually, the axial inner end of at least one of the plurality of slots will be  
25 radially inclined so that the at least one slot is longer where it is adjacent to and intersects the inner surface of the shank, as opposed to a shorter length where the slot engages and is adjacent to the outer surface of the shank.

Furthermore, this rivet assembly may have a shoulder formed on the  
30 mandrel head extending between the mandrel stem and an outer surface of the

mandrel head, which shoulder extends substantially perpendicular to the shank axis. Additionally, the opposed end of the shank may also comprise a substantially flat surface, again substantially perpendicular to shank axis, for complimentary flush fitting with this shoulder.

5

It is preferred that the wall thickness of the body is constant along its axial length and it is also usual that the external diameter of the shank is constant along this length.

10 Preferably, the mandrel stem will have a reduced diameter section adjacent to its shoulder so as to form a recess within the mandrel stem so that material displaced from the rivet body during the setting operation may be deformed into this recess to restrain the set mandrel head following the setting operation of the rivet.

15

It is also preferred that the maximum diameter of the mandrel head is equal to the diameter of the rivet shank so that the preformed hole into which the rivet is to inserted need only be sufficient diameter to receive the diameter of the rivet shank

20

According to a further aspect of the present invention there is also provided a punch for manufacturing the tubular body of a peel-type blind rivet of the type having an array of tapered slots formed in an opposed end of the shank, whereby the punch will comprise an elongate solid body having a polygonal cross section wherein at least one convergence zone formed on an end face of the punch by the tapering convergence of two adjacent side walls forms a slot cutting element. In this manner, these cutting elements will overlie the end face of the tubular rivet so as to form slots in the wall of the tubular body which increase in width between an outer surface and an inner surface thereof.

25  
30

Usually the convergence zone of each pair of adjacent side walls will form a cutting element on this end face, each of which will abut and form an appropriate slot in the rivet body.

- 5 In one embodiment, the adjacent side walls of the punch may be curved to provide a substantially curved cutting element. Where such walls are curved they are usually concave.

- 10 Preferably, the or each of the cutting elements formed on the end face of the punch will be radially inclined relative to a longitudinal axis of the punch, in this manner being able to form inclined inner ends of the slot in the rivet body.

- 15 The punch will, preferably, further comprise a cylindrical projection extending from the end face which is coaxial with a longitudinal axis of the punch, whereby this projection is for receipt within a central bore of the tubular body of the rivet to align the punch coaxial with that rivet during the slot forming procedure.

- 20 It is preferred that the polygonal cross section of the punch will comprise or define a regular polygon wherein each side of the polygon is substantially identical and uniform, preferably having equal angles between each adjacent side face of such polygon.

- 25 Preferably, the punch will have a substantially triangular cross section forming three slots within an appropriate rivet body.

There will now be described, by way of example only, a preferred embodiment of the present invention with reference to the accompanying illustrative drawings in which:

Figure 1 shows a partial cross sectional view of a peel-type blind rivet according to the prior art; and

Figure 1a is an end view of the rivet body of Figure 1; and

Figure 2 is a partial cross section of the rivet of Figure 1 shown in a set position; and

Figure 3 shows a partial cross section of a peel type blind rivet according to the present invention; and

Figure 4 is a plan view from one end of the body of the blind rivet of Figure 3; and

Figure 5 shows the peel-type blind rivet of Figure 3 in a set configuration; and

Figure 6 is a plan view of the shank of a peel-type blind rivet according to a second embodiment of the present invention; and

Figure 7a shows a plan view from one end of a punch tool used to form the body of the blind rivet of Figure 3; and

Figure 7b is a side view of the punch tool of Figure 7a when viewed along the arrow X; and

Figure 7c is a side view of an alternative embodiment of the punch tool of Figure 7a.

A peel-type blind rivet assembly (10), according to the prior art, is seen in Figure 1. This blind rivet assembly (10) comprises a tubular body (2) containing a mandrel (4), and having a head (8) formed by a flattened flange portion, presenting a circumferential shoulder (9) for engagement with a first workpiece. Four equally spaced elongate slots (12) are provided in the end (14) of the shank (6) remote from the head (8) and provide an expandable portion (16) of the shank, dividing this expandable end portion into four distinct legs (17) therebetween. The base (18) of each slot (longitudinally remote from an end (14) of the shank) is axially inclined relative to an axis of the shank such that the length of the slot is longer where it is adjacent to the inner surface of the body

(adjacent to the bore (20)) and is of a shorter longitudinal length where it is adjacent to the outer surface of the body.

5 The mandrel (4) is of conventional design comprising a head (26) having an underhead portion (28) which increases progressively in diameter from the mandrel stem (119) towards the maximum diameter of the mandrel head (26). In this embodiment the underhead shape (28) provides a radially inclined shoulder portion. Adjacent to the shoulder portion (28) the mandrel stem has a narrowed portion (34) forming an effective recess (35) adjacent to the mandrel head.

10

The mandrel stem is further provided with a breakneck (36), as is conventional to blind rivets, and effectively comprises a narrowed neck portion designed to break when a predetermined load is applied across this weakened region.

15

Figure 2 shows the rivet assembly (10) in a set configuration when used in a particular application in a soft material. Here, the prior art peel-type blind rivet assembly (10) is used to restrain a first, relatively thin, workpiece (50) (usually of metal) onto a relatively thick, considerably softer workpiece (52) which will usually be wood or plastics material. The first workpiece (50) is placed adjacent to the 20 second workpiece (52) and a hole (54) formed therebetween, usually by a drill. The rivet assembly (10) is then inserted into the hole (54) so that the shoulder (9) of the rivet head (8) engages with the outer surface of the workpiece (50). The rivet is then set in a conventional manner of setting a blind rivet (ie. by pulling the 25 mandrel (4) downwardly as viewed in Figure 1) whilst restraining displacement of the mandrel head (8) using a conventional rivet setting tool. As the rivet is set, the curved shoulder portion (28) beneath the mandrel head (26) engages with the weakened tail region (16) of the rivet body (2) so that the separate legs (17) of the weakened region (16) are displaced outwardly from the rivet body (2) and



so as to cut through and into the second workpiece (52) effectively compressing the soft material (70) which has been displaced by such cutting action.

This prior art embodiment further includes a circumferential groove (22) which has been preformed in the rivet body so as to be adjacent to the bases (18) of the slots (12), whereby the legs (17) of the deformed rivet body tend to bend about such groove (22). Furthermore, the legs (17) themselves are further bent or curved by the radial forces applied by the radial shoulder (28) as it engages the legs during the bending or deforming operation.

10

As the head (26) of the mandrel (4) is displaced towards the head (8) of the rivet body (2), the setting load increases due to the increased resistance as the head approaches the groove (22) and the increased setting load serves to help collapse the groove (22) causing rivet body material adjacent to the groove (22) to be displaced inwardly into the recess (35) about the mandrel stem, thus locking the mandrel head (26) in engagement with the set rivet body. The setting load continues to increase until the rivet fails at the breakneck (36) in a conventional manner. In this embodiment the mandrel head is thus retained within the set rivet.

20

Whilst the prior art device performs adequately, it has been determined that the curved nature of the deformed legs (17) in the set configuration (arising from bending thereof caused by the interaction with the curved shoulder (28) of the mandrel head (26)) results from anticlastic flow of material on the inner surface of such legs as they are stretched into the curved configuration shows in Figure 2. This results in the leg portions becoming slightly thinner than the main rivet body thickness and thus such deformed legs are thinner and weaker than the main, undeformed, region of the shank.

25

In addition, this prior art device comprises an additional manufacturing step in forming the indentation (22) which is able to react with the curved shoulder (28) to cause the rivet body material (72) to flow into the recess (35) to effect restraint of the mandrel head in the set rivet.

5

It will also be understood that, as the legs of the rivet body (2) bend during setting, the inner surface of the legs tend to increase in length. Material from the rivet body to accommodate this stretching will be provided from the section of the leg at that point in a movement known as anticlastic movement. This, in order to assist the movement of this material without creating undue stress, the base (18) of the slots (12) are inclined as shown in Figure 1.

The preferred embodiment of the present invention is now shown in Figure 3 and is effectively a modified version of the prior art peel-type blind rivet (10) as shown in Figure 1 and like parts of the rivet assembly of the present invention will now be identified by the same reference numbers to those used in Figure 1 but will include the prefix (1) or (10) for distinction.

Figure 3 shows a modified peel-type blind rivet assembly (110) of substantially similar configuration to the rivet assembly (10) and again comprises a tubular body (102) with a similar mandrel (104). The rivet body head (108), mandrel breakneck (136) and mandrel shank (106) are substantially identical to those shown in Figure 1. Again the mandrel comprises a mandrel head (126) and the mandrel stem has a recess portion (134) adjacent to this mandrel head to form a recess (135) again similar to that discussed with reference to Figure 1.

25

The significant difference of the blind rivet assembly (110) resides in the shoulder portion (128) extending between the mandrel stem (119) and the maximum outer diameter (131) of the mandrel head (126). As seen in Figure 3, this shoulder portion (128) is substantially perpendicular to the rivet axis (200)

30

and presents a substantially flat face for flush engagement with a substantially flat end surface (114) of the rivet body (102). Formation of such a mandrel is considerably simplified to that of the mandrel (4) as seen in Figure 1.

5       The second notable modification to the rivet assembly (110) is that the shank (106) is of constant diameter along its entire axial length and of constant thickness (in particular, there is no groove portion as seen in the rivet assembly (10)), thereby negating the additional manufacturing step involved in the creation of such a groove.

10

In addition, in the preferred embodiment of the rivet assembly of the present invention (110) shown in Figures 3 and Figures 4, the rivet body (102) has three longitudinally extending grooves (112) extending inwardly from the end (114) of the rivet body remote from the head (108) (as opposed to four in Figure 1) and, as particularly seen in Figure 4, these grooves (112) increase in width from an outer surface (127) of the shank (106) towards an inner surface (129) of the rivet body (102) (which surface (129) defining the rivet bore (120)). Also, as seen in Figure 3, the assembly (110) has bases (118) of the slots (112) which are again inclined inwardly from the outer surface (127) of the body (102) towards the inner surface (129) of such body. In this manner, the slots (112) are longer adjacent to the inner surface (129) of the rivet body (102) than when adjacent to the outer surface (127) of the body (102). However, this is an optional feature and these bases (118) may in fact be flat (or substantially perpendicular to the rivet axis (200)).

25

The slots (112) provide a significant advantage over the prior art slots (12) of Figure 1 in providing for an improved manufacturing process. In particular and with reference to Figure 7a and 7b, a more robust metal extrusion punch (280) can be used in the formation of these slots (112) and, hence, the rivet body (102). Firstly, referring back to the rivet assembly (10) shown in Figure 1a, it will

30

be appreciated that the metal extrusion punch required to form the grooves (12) will comprise a cylindrical support body (to be received within the bore (20) of the tubular rivet body (2)) with four perpendicular narrow cutting blades extending from this cylindrical tube for engaging the rivet body (102) to effectively cut the elongate slots (12) along such body (2) as the punch is passed through the bore (20). Both the formation of such a extrusion punch is relatively complex due to the relatively thin projections extending therefrom, and these relatively thin projections are subject to comparatively high stresses and are subject to significant wear and damage.

10

However, referring back to Figure 7a, the extrusion punch (280) developed for the current invention is considerably simplified and comprises a triangular extrusion punch which, in the embodiment shown in Figure 7a, has an axially extending location cylinder (281) extending from an end face thereof. The location cylinder (281) is of corresponding size to the bore (120) of the rivet body (102) of Figure 3 and serves to locate the punch (280) centrally of the rivet body. As such, a substantially flat end face (282) of the elongate punch (280) comprises three cutting elements (285) each formed as a convergence zone on this end face formed by the tapering convergence of two adjacent side walls of the punch. This convergence zone (282) (shown as a shaded region in Figure 7a) may be considered as the surface of the end face (282) formed between adjacent side walls of the punch (280) which, when aligned with the rivet body (102) are aligned with the shank walls so as to engage the end face (114). As shown in Figure 7a this region is defined as the face area between the projection (281) and the dotted lines indicating the outer diameter of the shank (106). As such, it will be appreciated here that whilst for ease of manufacturing the punch (280) is shown to have a triangular cross section, the apex of this cross section formed by the exact intersection of the side walls could be omitted since such apex does not actually engage with the rivet body during the punch operation. However, removal of such ends would involve an additional manufacturing step

and is unnecessary. What is clear, is that the cutting elements (285) are not necessarily formed in the end face at the exact apex of the converging side faces but may be set slightly back from such apex. However, it is the convergence zone of the side faces which forms the appropriate cutting element.

5

In addition, it will be appreciated that in the embodiment shown in Figure 7a and 7b the punch (280) is provided with a substantially flat end face (282) extending perpendicular to an axis (B) of such a punch, which will form substantially flat bases (18) of the slots (112) during the slot forming operation.

10 Alternatively, the cutting elements (285) could be inclined relative to the axis (B) of the punch (280) as shown in the alternative embodiment as shown in Figure 7c, so as to form the inclined bases (118) of the slots (112) of the embodiment of Figure 3. It will be further appreciated the projection (281) could, if required, be omitted and alternative alignment means between the punch (280) and rivet

15 body (102) employed.

In operation, the rivet body (102) is formed in a conventional manner following which the extrusion punch (280) is engaged with the free end (114) thereof so as to form the slots (112) as shown in Figure 4. This improved punch

20 (280) is more readily manufactured as a simple polygonal shape providing for greater strength since its cutting elements are considerably larger and more robust than those utilised in the prior art. Since this punch is more robust and easier to manufacture, it results in a reduction in production costs of such tools and is less prone to wear and failure.

25

Referring now to Figure 5, showing the rivet assembly (110) in its set configuration, the manner of setting the rivet (110) is substantially identical to that of rivet assembly (10), whereby again the mandrel (104) is engaged by a rivet setting tool and displaced relative to the rivet body (106) once the rivet assembly

(110) has been inserted in a preformed hole (154). However, the specific performance of the improved rivet assembly (110) will now be described.

As a setting load is applied (in a direction illustrated by arrow (F) in Figure 3) a compressive load is exerted by the flat shoulder (128) of the mandrel head (126) onto the corresponding flat end (114) of the rivet body, causing the legs (117) (defined between the array of slots (112)) to resiliently deform and to be splayed radially outward of the body (102) until the shoulder (128) engages with the inner surface (127) of these splayed legs (117). In this manner, there is now a linear displacement force created by linear engagement of the linear (non-curved) shoulder (128) with this inner surface (127) so that the legs are displaced in a cantilever manner about their engagement portion (157) with the main part of the shank (106). Here, the legs (117) are not themselves bent during this setting operation but are maintained in their original straight configuration and thus do not undergo any stretching or anticlastic deformation. In this way the set legs shown in Figure 5 are considerably stronger than those shown for the prior art embodiment shown in Figure 2, whilst the legs (117) themselves are still splayed so as to cut through the softer workpiece (normally wood) (52) in a similar manner to that shown in Figure 2 to compress the material between these legs and the outer workpiece (150). These non-deformed legs (117) retain their original thickness following setting and not being curved, so as to be stronger than those of the prior art and, as seen in Figure 5, which could be prone to deformation if a pull out force is applied to the set rivet.

As the mandrel head (126) is again displaced further into the rivet body (106) towards the head (108), the setting load increases due to the increased resistance incurred by the mandrel head (126) towards the end (118) of the slots (112), due to the main shank (106) of the body (102) being resistant to radial deformation since it does not have slots (112) extending therethrough. As this setting load increases, the substantially flat shoulder (128) of the mandrel head

(126) is no longer able to apply a radial displacement force to the legs (117) and thus effects a compressive force on the rivet body (in direction F) causing flow of the rivet body material into the recess portion (135) formed about the narrowed section (136) of the mandrel stem to again effect engagement between the

5 mandrel head and the rivet body in the set position. Increased loading force on the mandrel will then result in the mandrel failing at the breakneck (136) in a conventional manner. This modified assembly (110) provides additional strength in comparison to the prior art resulting from the cantilevered displacement of the performed legs (117) during the setting operation, thereby maintaining the

10 thickness of the leg sections to be the same as the thickness of the main rivet body wall following the setting operation, providing greater sectional strength.

Whilst this preferred embodiment shown in Figures 3 to 5 has utilised the formation of three slots (112) to form three corresponding legs (117) of equal

15 size (such slots being displaced at equal angles about the axis of the rivet), it will be appreciated that alternative numbers of legs and associated slots could be employed. If four slots were required to form four legs, then a substantially square punch could be employed, utilising the invention as discussed with relation to the setting tool (280) shown in Figure 7. If required, higher polygonal

20 numbers could also be employed by using punches having hexagonal or higher order cross sectional configurations. In addition, whilst the punch design according to the present invention comprises regular polygons as shown in Figure 7, the side faces of such punches need not be straight but could be curved to produce curved side walls of slots (212) within the rivet body (202), as

25 shown in the alternative embodiment in Figure 6 which have been formed by a substantially concave triangular punch to produce convex edges to the tapered slots (212) in such embodiment.

## CLAIMS

1. A peel type blind rivet assembly for setting in relatively soft material, said  
5 rivet assembly comprising :  
an elongate tubular body having a shank disposed about a shank axis  
and a preformed head at a first end thereof and an expandable portion at the  
opposed end of the shank remote from the head and formed by a plurality of  
slots, which slots terminate remote from said first end;  
10 a mandrel having a stem extending through and co-axial with said tubular  
body, which mandrel further having a head having a maximum external diameter  
greater than the internal diameter of the body; wherein,  
at least one of said plurality of slots increases in width as it extends from  
an outer surface to an inner surface of said shank.  
15
2. A blind rivet assembly as claimed in claim 1 wherein the side walls of said  
at least one slot are curved.
3. A blind rivet assembly as claimed in either of the preceding claims  
20 wherein each of said plurality of slots are equally spaced about the  
circumference of said tubular body so that the angular displacement between  
adjacent slots about the shank axis is constant.
4. A blind rivet assembly as claimed in any one of claims 1 to 3 wherein said  
25 plurality of slots comprises three slots.
5. A blind rivet assembly as claimed in any one of the preceding claims  
wherein an axial inner end of at least one of said plurality of slots is radially  
inclined so that said at least one slot is longer adjacent said inner surface of said  
30 shank than adjacent said outer surface of said shank.



6. A blind rivet assembly as claimed in any one of the preceding claims wherein said mandrel head forms a shoulder between a mandrel stem and an outer surface of said mandrel head, which shoulder extends perpendicular to  
5 said shank axis.

7. A blind rivet assembly as claimed in any one of the preceding claims wherein the wall thickness of said body is constant along its axial length.

10 8. A blind rivet assembly as claimed in claim 8 wherein the external diameter of said body is constant along its axial length.

9. A blind rivet assembly as claimed in any one of the preceding claims wherein said mandrel stem has a reduced diameter section adjacent said  
15 shoulder.

10. A blind rivet assembly as claimed in any one of the preceding claims wherein said maximum diameter of said mandrel head is equal to the diameter of said body.

20

11. A punch for manufacturing said tubular body of a peel type blind rivet as claimed in any one of the preceding claims, comprising an elongate solid body having a polygonal cross section wherein at least one convergence zone formed on an end face of said punch by the tapering convergence of two adjacent side  
25 walls forms a slot cutting element.

12. A punch as claimed in claimed 11 wherein the convergence zone of each pair of adjacent side walls forms a cutting element on said end face.

13. A punch as claimed in claim 11 or claim 12 wherein said adjacent side walls are curved.

14. A punch as claimed in claim 13 wherein said curved walls are concave.

5

15. A punch as claimed in any one of the claims 11 to 14 wherein the or each cutting element on said end face is radially inclined relative to a longitudinal axis of said punch.

10 16. A punch as claimed in any one of claims 11 to 15 having a cylindrical projection extending from said end face, and co-axial with a longitudinal axis of said punch, said projection for receipt within a central bore of said tubular body to align said punch therewith.

15 17. A punch as claimed in any one of claims 11 to 16 wherein said polygonal cross section defines a regular polygon.

18. A punch as claimed in any one of claims 11 to 17 which has a substantially triangular cross section.

20

19. A blind rivet assembly substantially as herein described with reference to the accompanying drawings.

20. A punch for manufacturing a tubular body of a peel type blind rivet, of the  
25 type according to any one of claims 1 to 10, substantially as herein described with reference to the accompanying drawings.

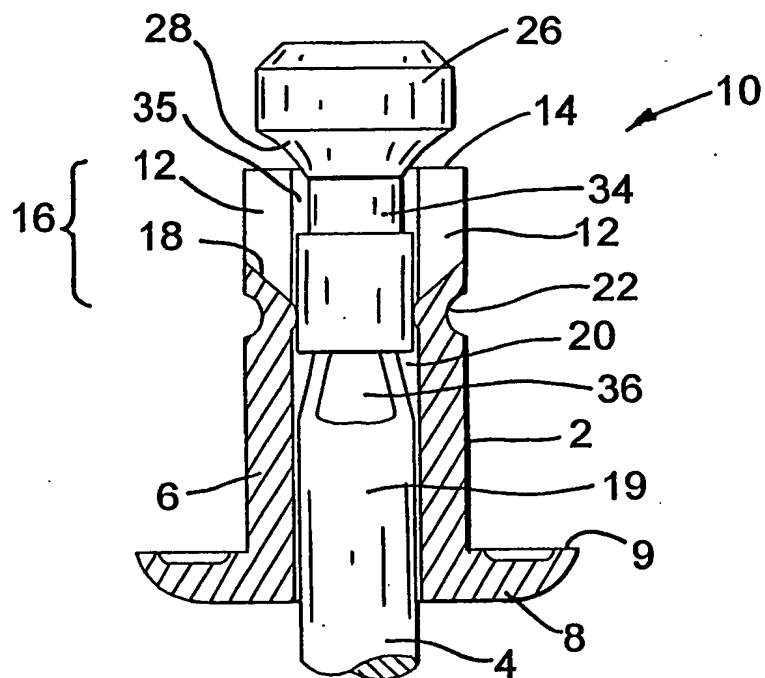


FIG.1

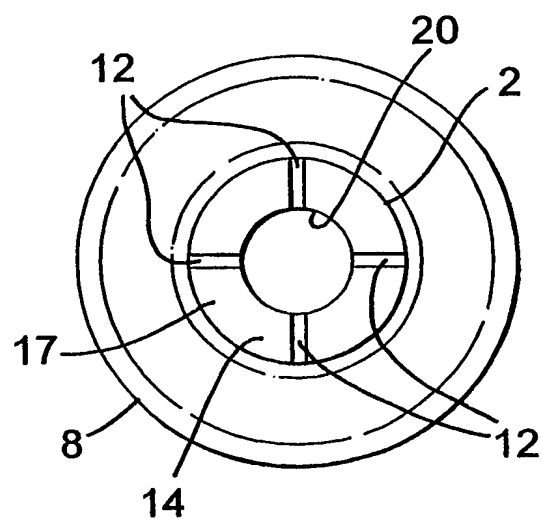


FIG.1a

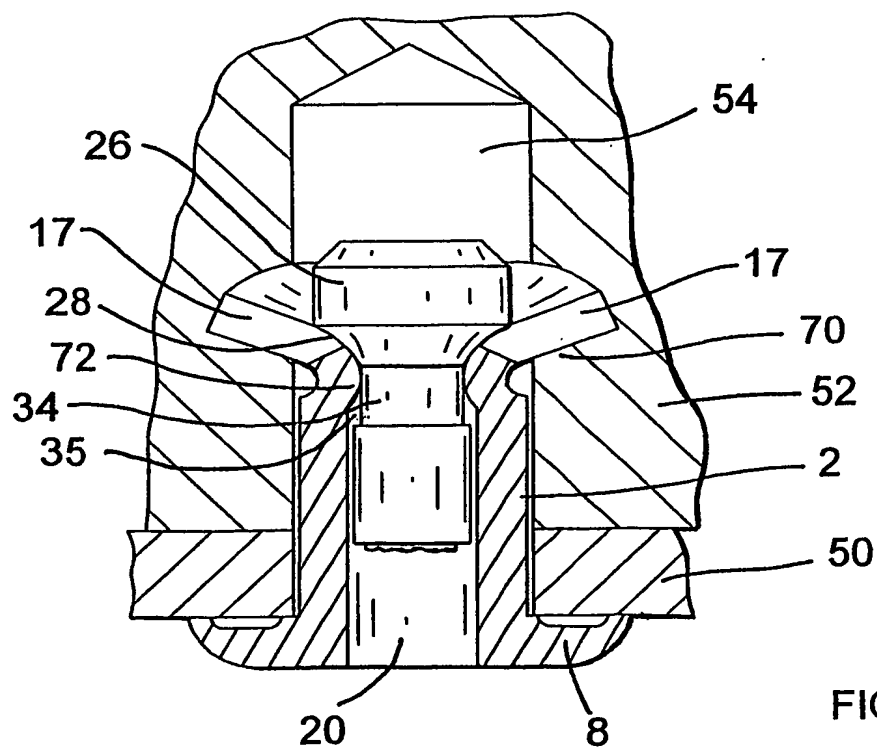


FIG.2

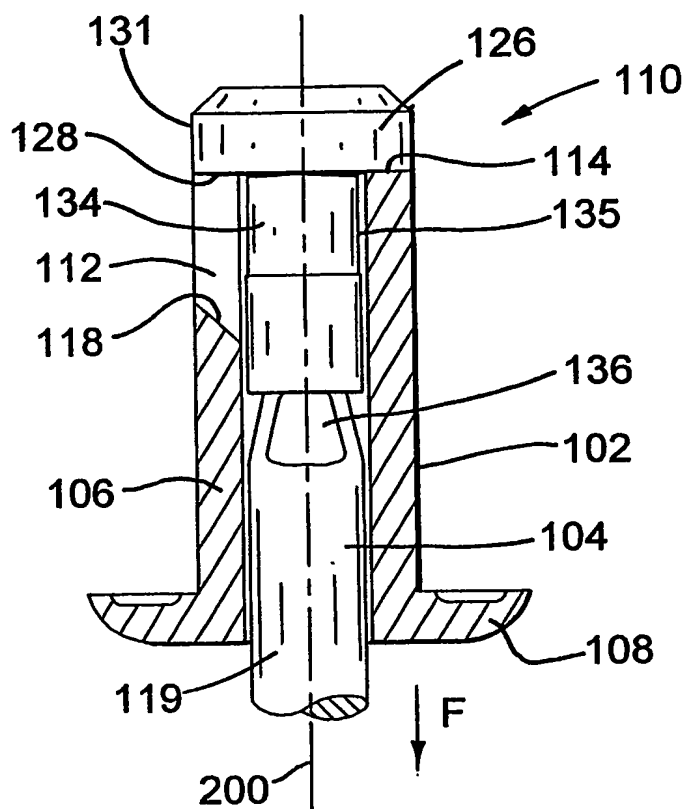


FIG. 3

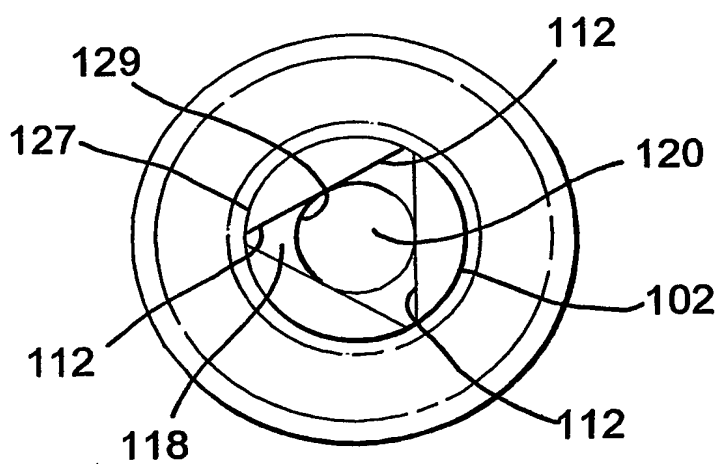


FIG. 4




FIG. 6




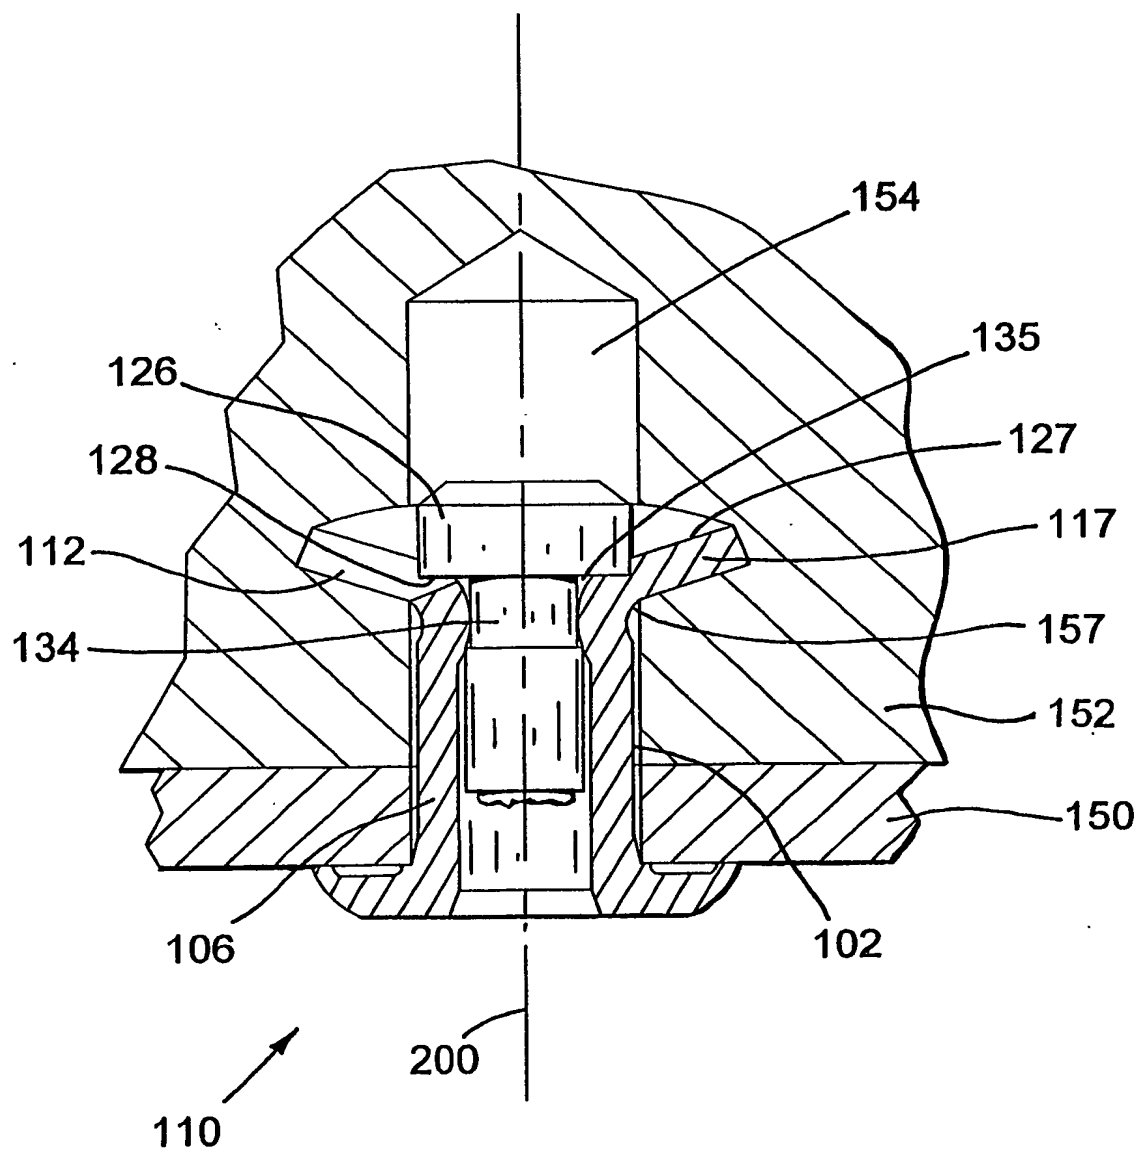


FIG.5

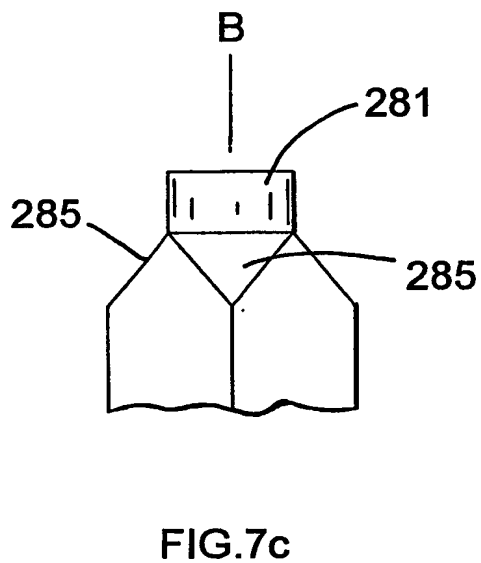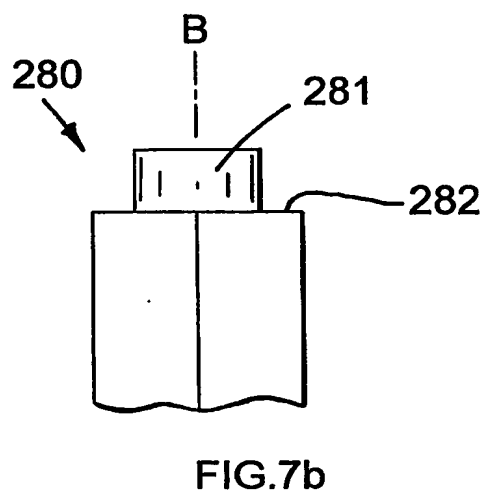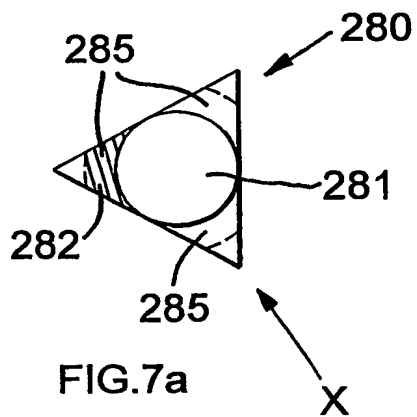

## INTERNATIONAL SEARCH REPORT

 International Application No  
 PCT/EP 03/03651

 A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 7 F16B19/10 B21K1/60

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F16B B21K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 677 666 A (AVDEL SYSTEMS LTD) 18 October 1995 (1995-10-18) figure 1	6
Y	GB 2 332 722 A (EMHART INC) 30 June 1999 (1999-06-30) cited in the application claims 1,5,6; figures 1,2	1-10
Y	US 5 183 357 A (PALM ERICH) 2 February 1993 (1993-02-02) abstract; figures 1,2,8,9,12-15	1-10
A	GB 876 255 A (OLYMPIC SCREW & RIVET CORP) 30 August 1961 (1961-08-30) figures 3,6-8	1-8
	-/-	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \*&\* document member of the same patent family

Date of the actual completion of the international search

24 July 2003

Date of mailing of the international search report

01/08/2003

 Name and mailing address of the ISA  
 European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Bousquet, K

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP 03/03651

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 99 64751 A (TEXTRON FASTENING SYSTEMS LTD) 16 December 1999 (1999-12-16)	11-20
A	page 1, line 12 - line 23 page 6, line 8 - line 14; figures 2,3	1,2
Y	DE 41 22 158 A (HILGELAND GMBH & CO GEB) 7 January 1993 (1993-01-07) column 2, line 1 - line 57; figure 1	11-20



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/03651

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0677666	A	18-10-1995	GB 2288649 A AT 163739 T AU 685910 B2 AU 1644795 A BR 9501575 A CA 2146950 A1 DE 69501672 D1 DE 69501672 T2 EP 0677666 A1 ES 2114273 T3 JP 7293531 A	25-10-1995 15-03-1998 29-01-1998 26-10-1995 14-11-1995 15-10-1995 09-04-1998 06-08-1998 18-10-1995 16-05-1998 07-11-1995
GB 2332722	A	30-06-1999	NONE	
US 5183357	A	02-02-1993	DE 4003373 C1 AU 7078991 A CA 2048690 A1 WO 9111628 A1 EP 0466861 A1 JP 4504612 T NO 913916 A	08-05-1991 21-08-1991 06-08-1991 08-08-1991 22-01-1992 13-08-1992 04-10-1991
GB 876255	A	30-08-1961	CH 356640 A CH 360869 A FR 1247946 A	31-08-1961 15-03-1962 09-12-1960
WO 9964751	A	16-12-1999	GB 2337951 A AU 4158399 A CA 2334216 A1 CN 1304479 T EP 1086316 A1 WO 9964751 A1 JP 2002517318 T US 6447399 B1	08-12-1999 30-12-1999 16-12-1999 18-07-2001 28-03-2001 16-12-1999 18-06-2002 10-09-2002
DE 4122158	A	07-01-1993	DE 4122158 A1 BR 9202593 A IT 1296069 B1	07-01-1993 16-03-1993 09-06-1999